

GreaseStopper[®]

Automatic Grease Interceptors

Models 15 - 100

Low Engineering



1D42

WASTE DISPOSER



Approvals

- PDI-G101
- UPC (IAMPO)
- ASME 112.14.3 & ASME 112.14.4 - 2000

All NEW Digital Timer is preset at the factory and can easily be reprogrammed for specific site conditions and requirements.



GreaseStopper™ Automatic Grease Interceptors

Low Engineering GreaseStopper™ (GS) Automatic Grease Interceptors are designed to intercept and remove large quantities of fats, oils, and grease (FOG) discharged from food service facilities and large commercial/institutional kitchens, which might interfere with the proper drainage and treatment of municipal wastewater.


Model GS Automatic Grease Interceptors are relatively small, allowing installation in a kitchen under a sink or other limited space. Model GS Automatic Grease Interceptors incorporate an electrically powered grease-skimming device.

During operation, the grease is separated by gravity floatation. Since grease is lighter than water, it floats and can be skimmed off the top surface of the water on a time or event controlled basis. The skimmed grease is essentially scraped or wiped from the skimmer surface, removed from the interceptor, and collected in a waste disposal container. The accumulated grease and oils can be disposed of or recycled. GS units ship with a UL-Approved, heavy-duty plug for use with a properly installed GFI outlet, according to appropriate electrical code. The plug can be removed for direct wiring if required by authority having jurisdiction.

Proven Performance

- Recovers, removes and recycles fats, oils and grease.
- Extremely low maintenance - only one moving part!
- Quality design and construction
- The Low Engineering Automatic Grease Interceptor - The Original Automatic - Still the best available interceptor!

General Arrangement

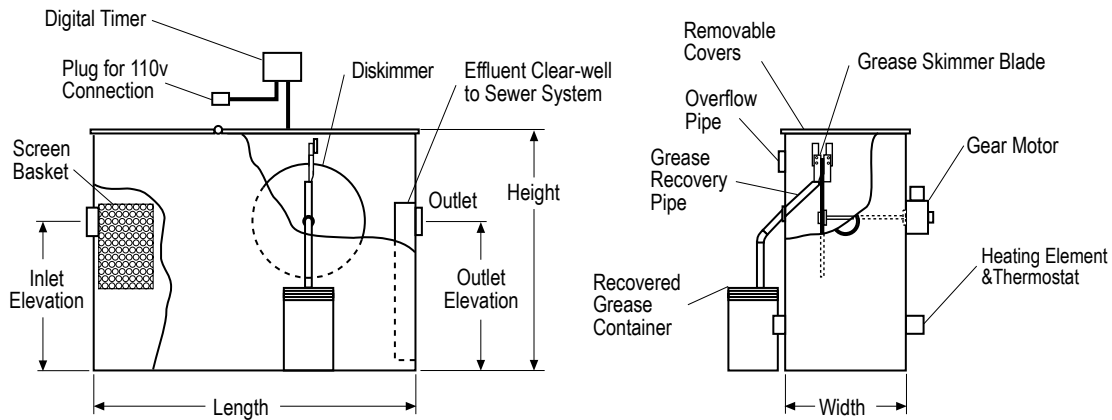

Model Capacity	Dimensions			Static Water (Gallons)	†Grease Holding Capacity (lbs.)	Inlet / Outlet Diameter	Inlet / Outlet Height
	Length	Width	Height				
*GS - 15	23"	12"	17"	9	50	2"/2"	9"/9"
*GS - 20	27"	14"	18"	13	69	2"/2"	9"/9"
*GS - 25	33"	16"	18"	17	91	3"/3"	9"/9"
GS - 25L	40"	22"	18"	19	83	3"/3"	6"/6"
GS - 30	36"	17"	19"	23	124	3"/3"	10"/10"
GS - 35	36"	18"	26"	44	253	3"/3"	17"/17"
GS - 50	40"	18"	33"	50	292	4"/4"	18"/18"
GS - 75	48"	18"	36"	75	458	4"/4"	22"/22"
GS - 100	60"	20"	36"	104	636	4"/4"	22"/22"

† National Plumbing Code requires a minimum 2 lbs. of grease detention for each GPM of flow.

* Low inlet/outlet height (at 6") available on AGI models 15, 20 & 25.
Custom sizes, inlet/outlet elevations available, consult factory.

Advantages

- Removes and recovers nearly 100% of the fats, oils and grease from kitchen and food processing drains.
- New Digital Technology removes grease automatically on a pre-programmed, timed basis.
- Constructed of stainless steel and other corrosion resistant materials - suitable for installation in almost any location.
- Includes an electric immersion heater to maintain grease temperature and consistency for effective removal.
- Recovered grease is collected in an external Waste Grease Container.
- Easy access to interior for maintenance and cleaning.
- Eliminates costs of cleaning pipes and/or holding tanks inside and outside of the building.
- Removable screen basket collects and contains solids.
- Automatic timing device assures removal of grease on a daily basis.
- Removal of grease quickly eliminates decomposition and rancid chemical reactions.
- Reduces Total Suspended Solids (TSS) and Biological Oxygen Demand (BOD) loading.
- Recycled grease conforms to most environmental protection programs.
- Extensive range of standard sizes and capacities; Custom manufacturing is available.
- Plug in unit can be hard-wired if required by authority having jurisdiction.



Please visit us at www.lowe-engineering.com

1510 Stoystown Road
Friedens, PA 15541
814-443-6800
FAX 444-8662

One Highland Road
Stoystown, PA 15563
814-893-5701
FAX 893-6126

4535 Elizabethtown Road
Manheim, PA 17545
717-664-0600
FAX 664-0617

958 19th Street
Watervliet, NY 12189
518-273-0801
FAX 273-1365

2700 Patterson Street
Greensboro, NC 27407
336-218-0801
FAX 218-1292

2225 Chestnut Street
Lebanon, PA 17042
717-664-0602
FAX 664-0631