

# GreaseStopper<sup>®</sup>

## Automatic Grease Interceptors

### Models 150 - 800

Low Engineering



#### GreaseStopper<sup>™</sup> Automatic Grease Interceptors

Low Engineering GreaseStopper<sup>™</sup> (GS) Automatic Grease Interceptors are designed to intercept and remove large quantities of fats, oils, and grease (FOG) discharged from food service facilities and large commercial/institutional kitchens, which might interfere with the proper drainage and treatment of municipal wastewater.


Model GS Automatic Grease Interceptors are relatively small, allowing installation in a kitchen under a sink or other limited space. Model GS Automatic Grease Interceptors incorporate an electrically powered grease-skimming device.

During operation, the grease is separated by gravity floatation. Since grease is lighter than water, it floats and can be skimmed off the top surface of the water on a time or event controlled basis. The skimmed grease is essentially scraped or wiped from the skimmer surface, removed from the interceptor, and collected in a waste disposal container. The accumulated grease and oils can be disposed of or recycled. GS units ship with a UL-Approved, heavy-duty plug for use with a properly installed GFI outlet, according to appropriate electrical code. The plug can be removed for direct wiring if required by authority having jurisdiction.

#### Proven Performance

- Recovers, removes and recycles fats, oils and grease.
- Constructed to conform to Plumbing and Drainage Institute (PDI) PDI-G101 Code ASME 112.14.3, 112.14.4 IAPMO (UPC) Approved
- Extremely low maintenance - only one moving part!
- Quality design and construction
- The Low Engineering Automatic Grease Interceptor - The Original Automatic - Still the best available interceptor!

## General Arrangement

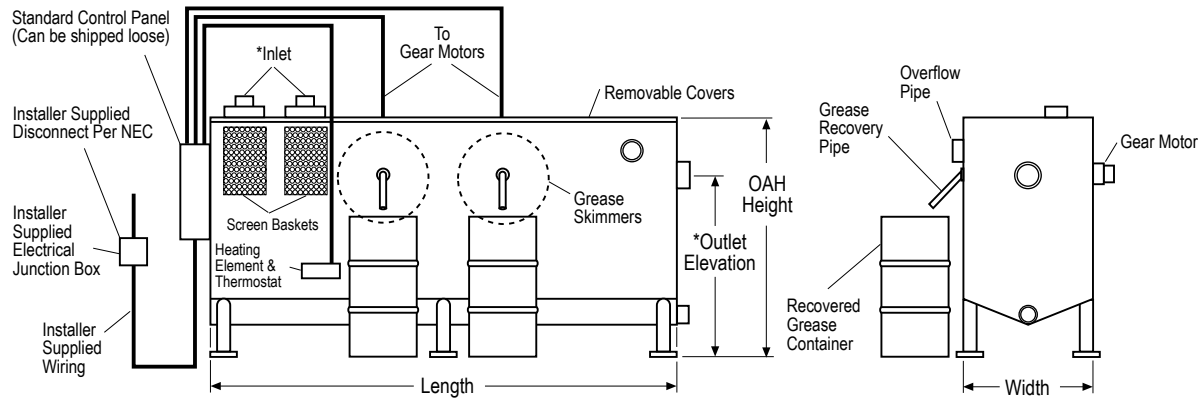

Model Capacity	AGI Dimensions			Static Water (Gallons)	†Grease Holding Capacity (lbs.)	Inlet/ Outlet Diameter	Inlet/ Outlet Height
	Length	Width	Height				
GS - 150	72"	30"	45"	215	1,279	4"/4"	*
GS - 200	96"	30"	45"	311	1,885	4"/4"	*
GS - 250	108"	30"	45"	344	2,070	5"/5"	*
GS - 300	126"	30"	45"	401	2,415	5"/5"	*
GS - 400	156"	30"	45"	476	2,844	5"/5"	*
GS - 600	174"	30"	52"	701	4,392	6"/6"	*
GS - 800	216"	36"	54"	1,077	6,786	5"/6"	*

† National Plumbing Code requires a minimum 2 lbs. of grease retention for each GPM of flow. Grease holding capacity at breakdown is determined by a minimum 85% efficiency rating in real life applications and installed according to specification.

\* Inlet can be directed through top or back of unit. Inlet and Outlet heights to be specified by end user.  
OAH (Over All Height) will be determined after Outlet Height is established.

## Advantages

- Removes and recovers nearly 100% of the fats, oils and grease from kitchen and food processing drains.
- Removes grease automatically - timed or by event.
- Constructed of stainless steel and other corrosion resistant materials - suitable for installation in almost any location.
- Includes an electric immersion heater to maintain grease temperature and consistency for effective removal.
- Recovered grease is collected in an external Waste Grease Container.
- Easy access to interior for maintenance and cleaning.
- Eliminates costs of cleaning pipes and/or holding tanks inside and outside of the building.
- Removable screen basket collects and contains solids.
- Automatic timing device assures removal of grease on a daily basis.
- Removal of grease quickly eliminates decomposition and rancid chemical reactions.
- Reduces Total Suspended Solids (TSS) and Biological Oxygen Demand (BOD) loading.
- Recycled grease conforms to most environmental protection programs.
- Extensive range of standard sizes and capacities; Custom manufacturing is available.



Please visit us at [www.highlandtank.com](http://www.highlandtank.com)

1510 Stoystown Road  
Friedens, PA 15541  
814-443-6800  
FAX 444-8662

One Highland Road  
Stoystown, PA 15563  
814-893-5701  
FAX 893-6126

4535 Elizabethtown Road  
Manheim, PA 17545  
717-664-0600  
FAX 664-0617

958 19th Street  
Watervliet, NY 12189  
518-273-0801  
FAX 273-1365

2700 Patterson Street  
Greensboro, NC 27407  
336-218-0801  
FAX 218-1292

2225 Chestnut Street  
Lebanon, PA 17042  
717-664-0602  
FAX 664-0631